

 **Infrico**
USA

WINE CELLARS



   InfricoUSA

 **Infrico**
USA

INFRICO USA CORP
11200 NW 25th Street STE 123
Sweetwater, FL 33172
305-777-9598
sales@infrico.com



5 YEAR WARRANTY

Parts & Labor - 7 YEAR COMPRESSOR



WINE CELLARS

Elevate your wine experience with our meticulously designer refrigerators. Precise temperature control for red, white, rosé, and brut wines. Protect your collection with UV-resistant glass or solid doors.

GENERAL FEATURES

DESIGN

These models have been designed for the exposure and sale of wine bottles, and represents the best solution for the wine service at the best temperature.

CONTROL SYSTEM

Our temperature management system offers unparalleled precision, allowing for highly accurate temperature settings. This ensures optimal performance and maximum satisfaction with every use.

REFRIGERATION

Temperature and automatic defrost regulated by a digital controller. Evaporator treated with anti-corrosion polyester Epoxi. Ventilated condensation system. Ventilated evaporation system.

DOORS

Self-closing door system features a permanent pressure mechanism, ensuring a secure closure every time. Additionally, a convenient 'stay open' feature engages when the door remains open at 95 degrees or beyond. Our doors also include triple chamber door gaskets that are easy to remove and snap in, ensuring an effective seal. Double panel glass (4-8-4), low emissive hardened glass.

LIGHTING

LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% to 90% compared to a traditional bulb, better light quality.

100% TESTED

All condenser units are 100% tested, in helium chambers for refrigerant leak detections.

CERTIFIED

Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.

STANDARD FEATURES

EXTERIOR - INTERIOR

- 100% Pine wood exterior (Top, Front, Sides). Pre-painted galvanized steel interior.

INSULATION

- CFC- Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
- Low GWP & Zero ODP effect.

ELECTRICAL


- Cord and NEMA 5-15P plug.
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP **breakers required.**



Standard shelves: EVV100 & EVV200MX



Option shelves: EVV100 & EVV200MX
203R34-01

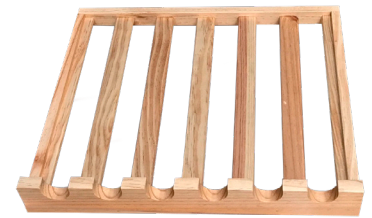

Standard shelves: EVV23R1G & EVV49R2G

OPTIONAL FEATURES

Decoration:
cherry (standard), black or white (optional).

Additional shelves.

Electrical connection is 230 V / 1 ph / 50 Hz (Plug type varies).



MODEL	OVERALL DIMENSIONS		DOORS	SHELVES	BOTTLES	(F°)	(FT3)	(HP)	115V	(LBS)	DOE	
IMD-EVV100	25 - 7/8	23 - 1/2	75 - 1/2	1	7	39°F / 64°F	12	1/4	4.2	360	Hydrocarbon R-290	
IMD-EVV200MX	51 - 3/4			2	7+7		100+100	12+12	1/4+1/4	8.4		630
IMD-EVV23R1G	27 - 1/8	23 - 5/8	80	1	5		90	11.3	1/3	4.5		310
IMD-EVV49R2G	54 - 1/2			2	7+7		90+90	22.6	1/3+1/3	6.65		580

Recommended temperature for red wine is 50°F to 64°F. White, rosé and brut is 39°F to 46°F